



Tempo LED Floodlight

BVP163 LED220/CW 220W 220-240V SWB GM

Tempo LED Floodlights are highly versatile and are designed to meet diverse application requirements, including billboards, high mast poles, building facade, sport stadiums (non professional), parking spaces, or indoor industrial workspaces. Not only do TempoLED Floodlights provide illumination of high performance, they also combine functionality with aesthetics, without compromising on cost efficiency and reliability.


Product data

General Information	
Driver included	Yes
Protection class IEC	Safety class I
CE mark	CE mark
Spare parts available	No
Operating and Electrical	
Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Mechanical and Housing	
Housing Material	Aluminum extruded
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK07 [2 J reinforced]

Over Time Performance (IEC Compliant)	
Median useful life L70B50	30000 h


Application Conditions	
Average ambient temperature	35 °C

Product Data	
Full product code	911401697202
Order product name	BVP163 LED220/CW 220W 220-240V SWB GM
EAN/UPC - Product	8710163304663
Order code	911401697202
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	911401697202
Net Weight (Piece)	7.000 kg



Tempo LED Floodlight

Dimensional drawing

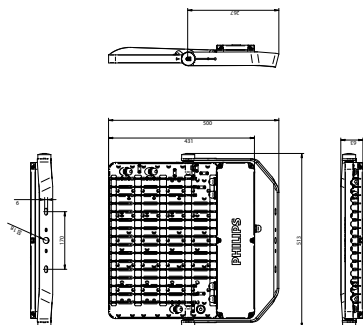

Tempo LED Floodlight BVP162/163

