



CorePro LEDbulb

LEDBulb 40W E40 6500K 230V A130 APR


Product data

General Information	
Cap base	E40 [E40]
RoHS mark	RoHS mark
Nominal lifetime (nom.)	10000 h
Switching cycle	50000X
Technical type	40-75W
Light Technical	
Colour code	765 [CCT of 6,500 K]
Beam Angle (Nom)	150 °
Luminous flux (nom.)	5000 lm
Luminous flux (rated) (nom.)	5000 lm
Colour designation	Cool Daylight
Correlated colour temperature (nom.)	6500 K
Luminous efficacy (rated) (nom.)	125.00 lm/W
Colour consistency	<6
Color rendering index (nom.)	70
LLMF at end of nominal lifetime (nom.)	70 %
Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	40 W
Lamp current (nom.)	340 mA
Wattage equivalent	75 W
Starting time (nom.)	0.5 s

Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	90 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb finish	Frosted (FR)
Product Data	
Full product code	871869671552900
Order product name	LEDBulb 40W E40 6500K 230V A130 APR
EAN/UPC – product	8718696715529
Order code	71552900
Numerator – quantity per pack	1
Numerator – packs per outer box	6
Material no. (12NC)	929001355908
Net weight (piece)	0.317 kg

CorePro LEDbulb



Dimensional drawing




A130 220-240V 40-75W 6500K E40 ND

Product	D	C
LEDBulb 40W E40 6500K 230V A130 APR	130 mm	232 mm

Photometric data

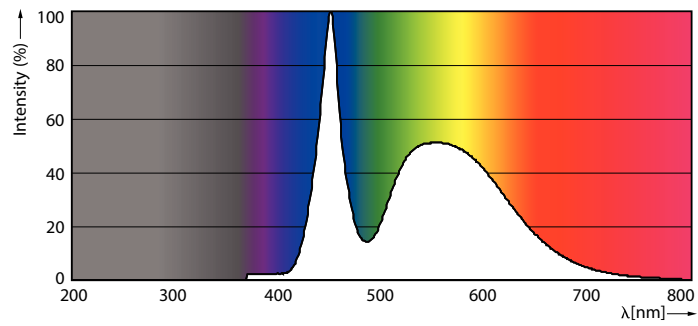

E40 A130



CorePro LEDbulb

Lifetime

