

SmartBright Slim Panel G2

RC091V LED36S/865 PSU W60L60 GM G2

Economic office lighting solution

Product data

General Information	
Beam angle of light source	- °
Light source color	865 cool daylight
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit external
Driver included	Yes
Optic type	-
Optical cover/lens type	Polystyrene bowl/cover prismatic
Luminaire light beam spread	120°
Control interface	-
Connection	Connection unit 2-pole
Cable	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	-
CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Constant light output	No
Number of products on MCB of 16 A type B	57
EU RoHS compliant	Yes

Light source engine type	LED
Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Inrush current	6.56 A
Inrush time	0.05 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing Material	Aluminum extruded
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover/lens material	Polystyrene
Fixation material	-
Optical cover/lens finish	Frosted
Overall length	597 mm
Overall width	597 mm
Overall height	31.5 mm

SmartBright Slim Panel G2

Color	White
-------	-------

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3600 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	90 lm/W
Init. Corr. Color Temperature	6500 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.38, 0.38) SDCM≤5
Initial input power	40 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)


Median useful life L70B50	25000 h
---------------------------	---------

Application Conditions


Ambient temperature range	-10 to +35 °C
Maximum dim level	Not applicable
Suitable for random switching	No

Product Data

Full product code	871016332472200
Order product name	RC091V LED36S/865 PSU W60L60 GM G2
EAN/UPC - Product	8710163324722
Order code	911401723822
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	911401723822
Net Weight (Piece)	2.000 kg



Dimensional drawing

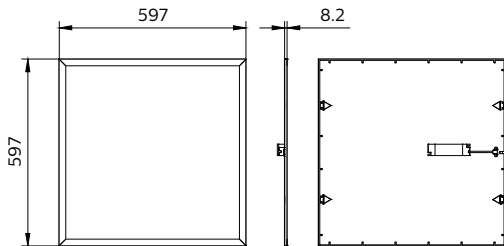

RC091V LED26S/LED36S PSU

